

KeHong Enterprises Co.,Ltd.

No,802,Building 10, Yuzhou 4 Street, Jin sha zhou, Baiyun District, Guangzhou, China.

Website: www.khenterprise.en.alibaba.com

Mail: lily@gzhelectric.com

Tel: +86-20-82586869, Mobile: +8615918777767

Model: CBO-6

Heat Shrink special 6-cores Breakout



Application:

Made of cross linked polyolefin, inner coated with adhesive at the ends



Provide sealing protection over 6-core cable crutch for variable frequency cable, trailing cable, telecommunication cables, control cable, etc.

Continuous operation temperature: -45°C to 105°C

Shrink temperature: start at 110°C, and fully recovered at 135°C

Technical Data:

Property	Test Method	Standard Value
Operation Temperature	IEC 216	-45 to 105°C
Tensile Strength	ASTM-D-2671	≥12MPa
Elongation at Break (120°C, 168 hrs)	ASTM-D-2671	≥300%
Tensile Strength after Aging (120°C, 168 hrs)	ASTM-D-2671	≥10MPa
Elongation at Break after Aging	ASTM-D-2671	≥230%
Dielectric Strength	IEC 60243	≥20kV/mm
Water Absorption	ISO 62	≤0.5%
Volume Resistivity	IEC 60093	≥10 ¹⁴ Ω.cm

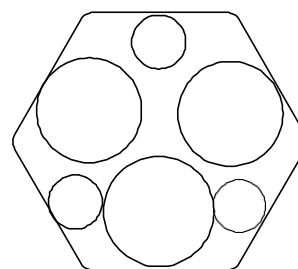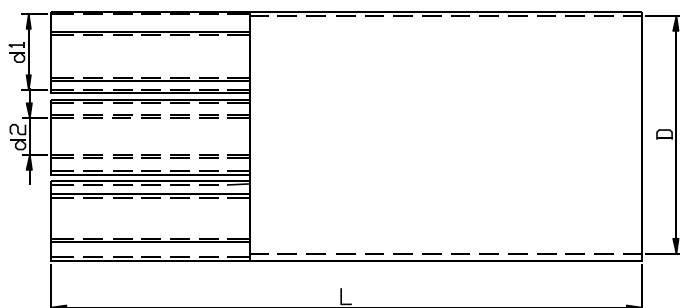

KeHong Enterprises Co.,Ltd.

No,802,Building 10, Yuzhou 4 Street, Jin sha zhou, Baiyun District, Guangzhou, China.

Website: www.khenterprise.en.alibaba.com

Mail: lily@gzhelectric.com

[Tel:+86-20-82586869](tel:+86-20-82586869), Mobile: +8615918777767

Selection Table

Diameter		Finger Diameter				Length	Finger Length
						/mm(±10%)	/mm(±10%)
Supplied	Recovered	Supplied (Min) /mm		Recovered		Supplied	Supplied
(Min) /mm	(Max) /mm			(Max) /mm			
		Larger	Smaller	Larger	Smaller		
≥86	≤40	≥32	≥20	≤11	≤8	220±5	60
≥133	≤53	≥55	≥31	≤16	≤11	220±5	70